



Nitrile

## Affordable protection and comfort

- Manufactured with a thinner nitrile formulation that increases comfort and improves flexibility without compromising protection
- Offers textured fingertips to provide an improved grip for a variety of applications
- Packed 300 gloves per dispenser box to provide additional value and convenience
  - \*250 pieces/dispenser for Size XL



### Industries

- Food Processing
- Automotive
- Life Sciences

### Recommended For

- Catering/Meal preparation
- Food processing and handling
- Inspection of parts, equipment
- Assembly and inspection of components
- Equipment repair and maintenance
- Picking and fastening components
- Adjusting parts and systems
- Handling of paint/glue guns and sprayers
- Transferring liquids and solids
- Sample taking and processing



## TECHNICAL DATA SHEET

### PRODUCT INFORMATION

	<b>82-133</b>
<b>Material</b>	Nitrile
<b>Color</b>	Cobalt
<b>Glove Design</b>	Chlorinated, Silicone Free, Textured Fingers
<b>Cuff</b>	Beaded
<b>Manufacturing/QMS Audit Standards</b>	ISO 9001:2008
<b>Regulatory/Standards Compliance</b>	Category III, EAC TP TC 019:2011, EC 1935/2004, EC 2002/72, EC 2023/2006, EN ISO 374-1:2016, EN 374:2003, EN 420:2003 + A1:2009, EN ISO 374-5:2016, FDA21 CFR 177-2600, ISO 9001, ISO 13485
<b>Packaging</b>	300 gloves per dispenser, 10 dispensers per shipper, 3000 gloves per shipper **Size XL 250 pieces/dispenser, 2500 pieces/shipper
<b>Storage</b>	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
<b>Country of Origin</b>	Malaysia
<b>User Needs Segment</b>	High Touch
<b>Available sizes</b>	S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10)
<b>Anti-static</b>	Yes
<b>Vulcanization Chemical Accelerators</b>	<ul style="list-style-type: none"> <li>Zinc Dibutyldithiocarbamate (ZDBC)</li> <li>Zinc Diethyldithiocarbamate (ZDEC)</li> </ul> <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

### PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	230 / 9.1		ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D6319-10, ASTM D5151-06 (2011)
Palm Thickness (mm/mils)	0.06 / 2.4		ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.08 / 3.1		ASTM D3767, EN 420
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D6319-10
Elongation at Break (%)	≥ 500	≥ 400	ASTM D6319-10
Force at break (N)	3	3	EN 455-2

### ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
<b>Product Code</b>	82133060	82133070	82133080	82133090	82133100

For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

#### Asia Pacific Region

Ansell Global Trading Center  
(Malaysia) Sdn Bhd  
T: +603 8310 6688  
F: +603 8310 6699

#### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

#### Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133


#### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

#### Russia

Ansell PYC  
Ten. +7 495 258 13 16

### Performance Standards and Regulatory Compliance

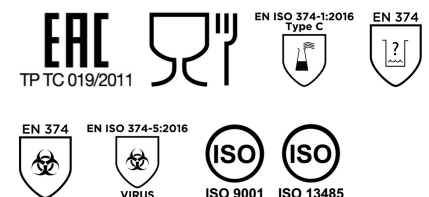

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2021 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.